




# 32JZG3828



Typical Applications:

- B.U Councer
- massager

REDUCTION RATIO	L
1/5.8	17.5
1/53	22.5
Customization Accepted	

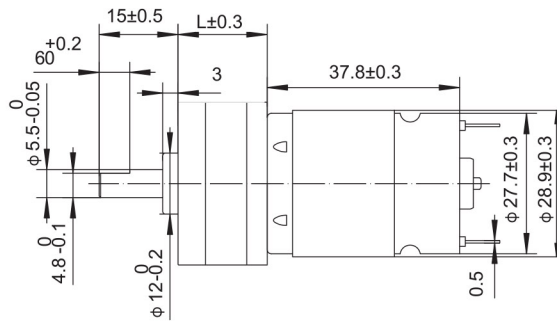

## GEARED MOTOR TORQUE/SPEED

MODEL	VOLTAGE		NO LOAD			AT MAXIMUMM EFFICIENCY				STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
							mN.m	g.cm		mN.m	g.cm	
32JZG3828-5023-5.8	2.5~5.0	3.6	2713	1.4	2176	5.67	39.23	400.1	8.94	198.09	2020	22.94
32JZG3828-4018-53.3	2.0~4.0	2.4	120	0.87	105	3	147	1500	7.2	/	/	/

