

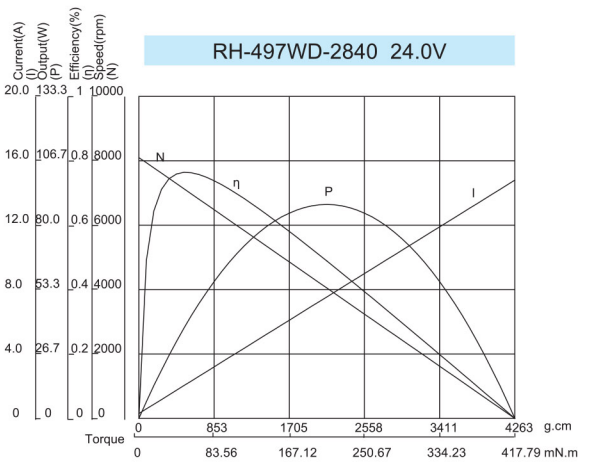


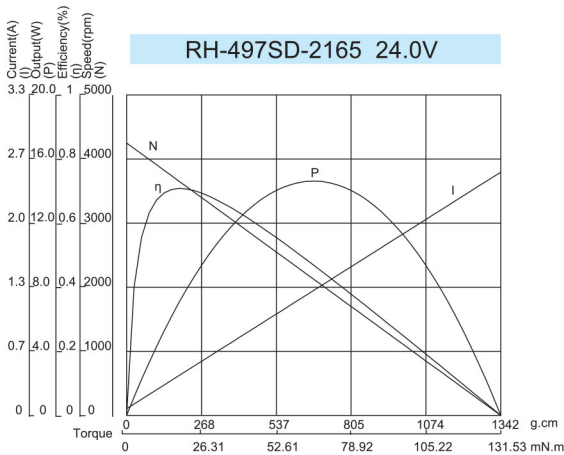

OUTPUT: APPROX 2W~30W
DC Motor

Typical Applications :

- Printer
- Automobile products
- Boot of automobile

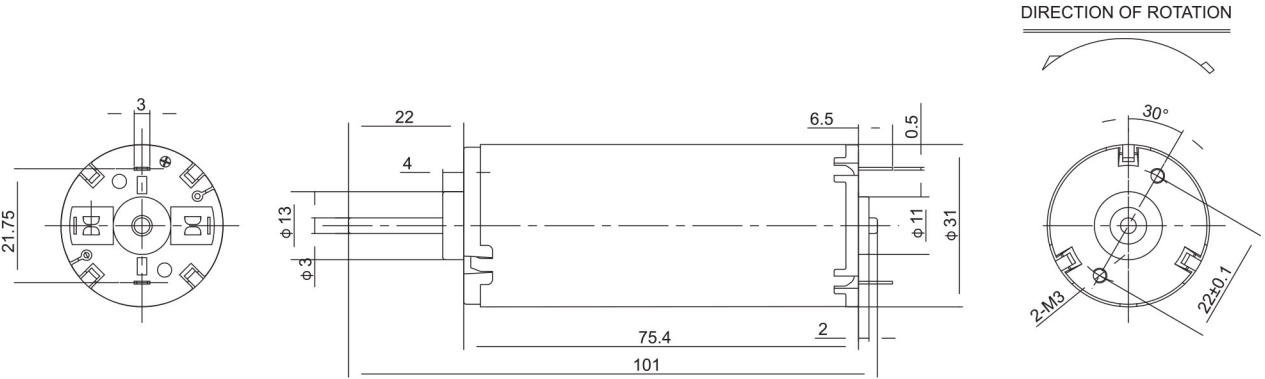

MODEL	VOLTAGE		NO LOAD			AT MAXIMUM EFFICIENCY				STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
		V	r/min	A	r/min	A	mN.m	g.cm	W	mN.m	g.cm	A
RH-497SD-2165	15.0-28.0	24	4250	0.07	3644	0.42	18.76	191.4	7.16	131.52	1342	2.53
RH-497SD-4218	6.0-15.0	12	8630	0.21	7835	2.07	22.93	234	18.82	248.72	2538	20.39
RH-497WD-2840	15.0-28.0	24	8100	0.3	7090	2.11	52.08	531.4	37.71	417.77	4263	14.79

Please inquire your sales representative for output, performance and EMC solution.