FC-130SD

OUTPUT : APPROX 0.2W - 1.5W
DC Motor

Typical application/automobile:

- Rear-view mirror

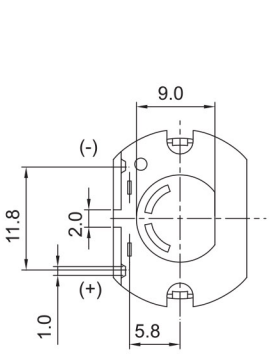

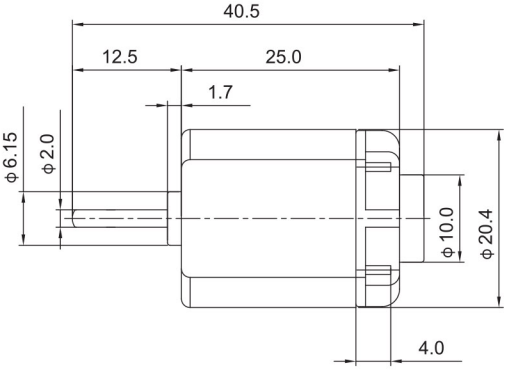

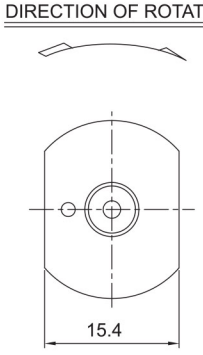

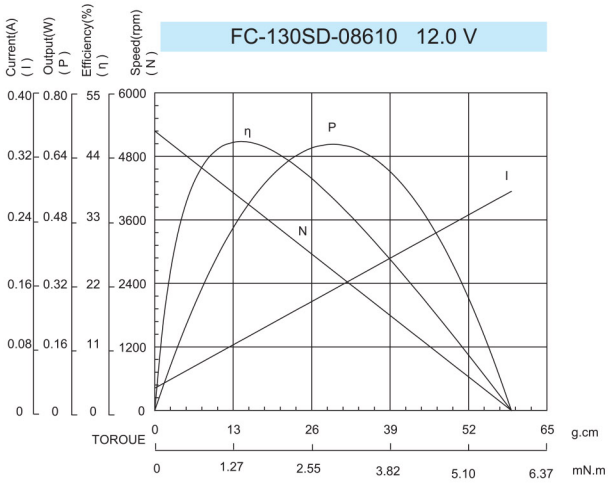

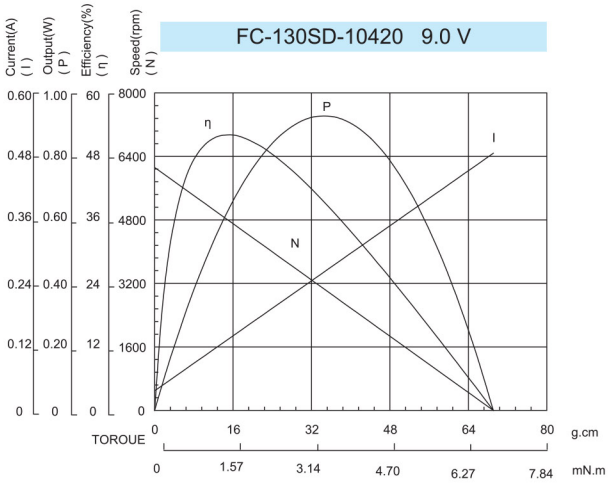

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL		
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
		V	r/min	A	r/min	A	mN.m	g.cm	W	mN.m	g.cm	A
FC-130SD-08610	9.0 ～15.0	12.0	5278	0.028	4004	0.088	1.40	14.3	0.49	5.81	59.2	0.277
FC-130SD-10420	6.0 ～12.0	9.0	6122	0.037	4798	0.134	1.46	14.9	0.63	6.75	68.9	0.486

Please inquire your sales representative for output, performance and EMC solution.

HS-Motor GmbH • Rohrlochstr. 10 • 72336 Balingen • Germany
Phone +49 7433 278 38 10 • E-Mail: info@hs-motor.de