

RS-555SH






OUTPUT: APPROX 1W-50W

DC Motor

Typical Applications :

- Printer
- Vending machine
- Car antenna

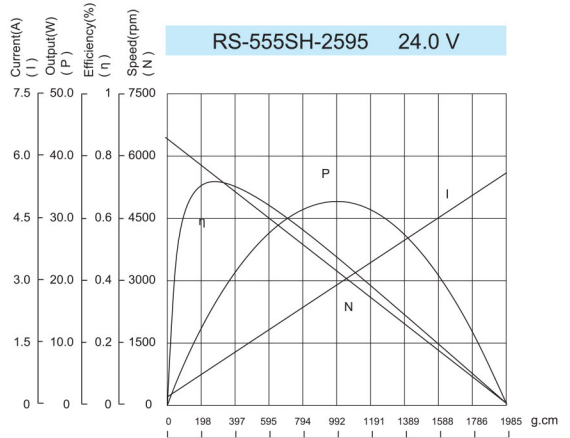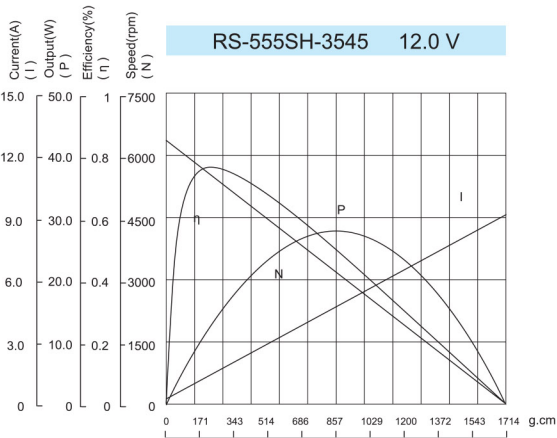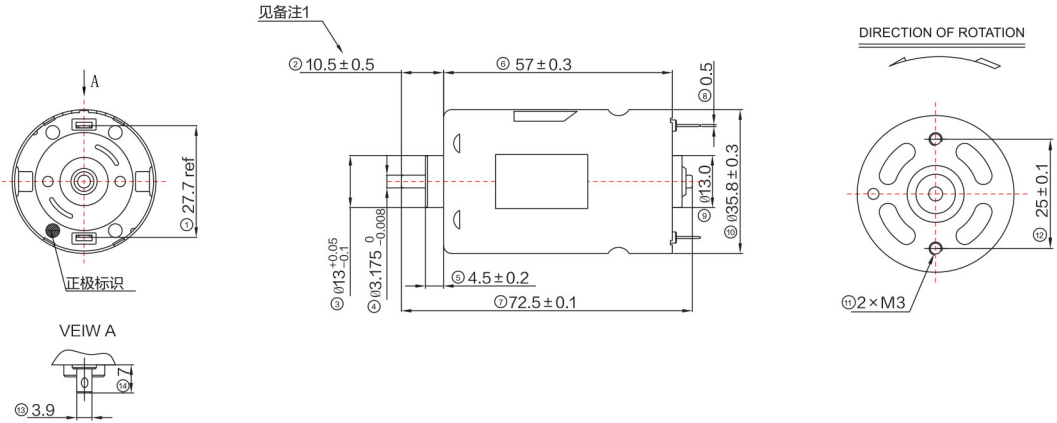

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE		OUTPUT	TORQUE		CURRENT
		V	r/min	A	r/min	A	mN.m	g.cm	W	mN.m	g.cm	A
RS-555SH-3545	9.0 ~ 15.0	12.0	6352	0.227	5484.87	1.44	2.34	234.04	13.19	17.14	1714.44	9.08
RS-555SH-2595	20.0 ~ 28.0	24.0	6450	0.15	5543.37	0.92	2.79	278.96	15.89	19.84	1984.62	5.61

Please inquire your sales representative for output, performance and EMC solution.